

# Technical data sheet

## Fire protection duct PYROLINE® Con D BSK I120/E90

Item number: 7215231



Fire protection duct made from water and frost-proof fibreglass light concrete of building material class A1 according to EN 13501-1 for fireproof laying of cables in rescue and emergency routes, and for the maintenance of electrical functionality of safety-relevant systems. Classification I120 as I duct according to DIN 4102 Part 11 and classification E90 as E duct according to DIN 4102 Part 12.

Mounting of the duct directly on walls or under ceilings.

Including countersunk head screws and sealing strips.  
Including countersunk head screws and sealing strip.



Fibreglass lightweight concrete

### Master data

Item number	7215231
Type	BSKD12-K1021
Description 1	Fire protection duct I120/E90
Description 2	Direct mounting
Manufacturer	OBO
Dimension	1000x105x210
Colour	Grey
Material	Fibreglass lightweight concrete
Smallest sales unit	1
Unit of quantity	Metre
Weight	3096 kg
Weight unit	kg/100 m


# Technical data sheet

Fire protection duct PYROLINE® Con D BSK I120/E90

Item number: 7215231



## Dimensions

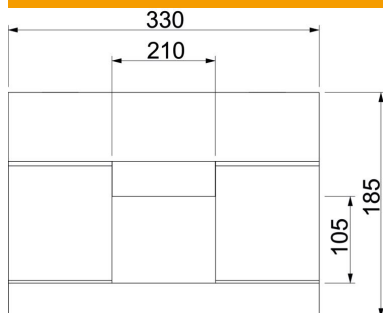

Length	1,000 mm
Width	330 mm
Height	185 mm
Dimension B	330 mm
Dimension b	210 mm
Dimension h	105 mm
Dimension H	185 mm

## Technical data

Number of flammable sides	3
Cover fastening	Screw
Fire resistance class E – function maintenance	90
Fire resistance class I – installation duct	120
With perforation	no
Usable cross-section	22050 mm <sup>2</sup>
Partitions possible	yes
Jacketing	Without
Material of the insulation	Glass-fibre lightweight concrete